# Guardian

FULL Height Turnstile




### Safe and practical safety.

Guardian is the full-height turnstile, featuring a sturdy reliable structure, made up of the best materials to withstand prolongued intensive use and weather conditions. It's a gurantee in terms of safety and security wherever there are large openings such as railway stations, ports and tourist facilities.






#### **Dimensions** (mm)









001PSHPS01 - 001PSGS3




Set up to fit


control sensors



Two-way LED warning display



001PSGD3



#### **CONTROL OPTIONS AND INTEGRATIONS**

- The ENTRY and EXIT commands allow user passage while the turnstile automatically locks right after passage, or after a pre-set time if there is no passage.
- The LOCK command also prevents passage and cancels the effects of any entry or exit commands.
- The EMERGENCY command allows the turnstile to open and move even when the LOCK command is activated.

#### **PERFECT INTEGRATION**

All Guardian versions can perfectly integrate with Came's RBM21 and RBM84 systems to obtain a complete transit control system.

#### LED LIGHTING

Guardian is fitted with handy LED lights to illuminate the passage area. It comes with a standard stop-go light fitted at the top of the turnstile.


#### **IF YOU WANT THE UTMOST**


On request, Guardian is available in the full AISI 304 stainless steel version. Utmost aesthetics and durability against weather conditions.

#### 230 V AC ELECTRONICS!

- Fluid movement even under intensive use.
- Automatic release in case of power outages.







1520

## Read up at came.com about the full range of Came products!

Came is a market leading home, industrial, and special technological projects automation manufacturing company.

A full range of household solutions: from operators for gates and garage doors, to shutter and awning winding motors, and even home automation control, to burglar proof and video entry systems. Technology and reliability to serve your business, thanks to solutions designed for powering large industrial doors, automatic doors, street barriers, turnstiles, access control systems and parking facilities.



CE




GARANZIA QUALITÀ ORIO Came products are entirely designed and made in ITALY



MODEL	PSHPS01	PSGS3 • PSGS4	PSGD3 • PSGD4
Protection rating (IP)	44	44	44
Power supply (V - 50/60 Hz)	-	120 - 230 AC	120 - 230 AC
Operating power supply (V)	-	24 DC	24 DC
Draw (mA)	-	223	446
Weight (kg)	400	350	650
Operating temperature (°C / °F)	-20 ÷ +55 / -4 ÷ +131	-20 ÷ +55 / -4 ÷ +131	-20 ÷ +55 / -4 ÷ +131

SOME VERSION MAY NOT BE AVAILABLE IN YOUR COUNTRY. FOR MORE INFORMATION PLEASE CHECK WITH YOUR LOCAL AUTHORIZED DEALER.

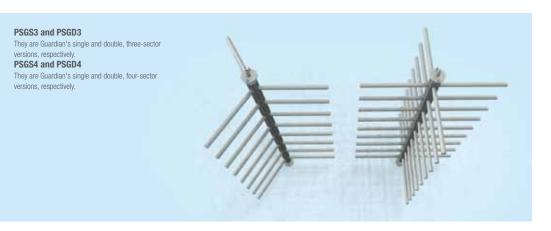

#### SYSTEM'S COMPLEMENTARY ELEMENTS



- 1. Monodirectional safety barrier for cart transit. Available with two, three or four arches.
- 2. Floor anchored safety barrier in AISI 304 stainless steel with polycarbonate panel; thickness 6 mm (0.23 in). H = 900 mm (35.4 in).
- 3. Floor anchored safety barrier in AISI 304 stainless steel without panel. H = 900 mm (35.4 in). 4.
- AISI 304 stainless steel safety barrier with antipanic handle. Available with left or right hand post. L = 900 o 1,200 mm (35.4 or 47.2 in), H = 1,000 mm (39.3 in).
- 5. Galvanized steel riser with anchoring flange and chromed plastic flange cover. H = 980 mm (38.6 in). Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes. Alst 304 statistics steel riser plus anchord plage and flange cover. If = 900 mm (82.6 ii), Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes.
- Transparent polycarbonate panel 6 mm thick. L = 750 mm (29.5 in), H = 800 mm (31.5 in).
- AISI 304 stainless steel riser. H = 900 mm (35.4 in), Ø 80 mm (3.15 in). 8.
- Available without clips, with 2 clips, with 2+2 90° or 180° clips, with 6 clips, with 8 clips.
- 9. Joining sleeves. Available in chromed plastic, AISI 304 stainless steel and AISI 304 stainless steel specifically for wall mounting.
- 10. Horizontal tube for AISI 304 stainless steel safety barriers. Ø 40 mm (1.57 in) thickness 1 mm (0.04 in). Available in several measurements: 500, 1,000, 1,500, 2,000 mm (19.7, 39.4, 59.1, 78.7 in).



© CAME SPA - KDEP#CEN3CA3S114 - JAN 2014 - EN

• 230 V AC



Came is a company of CAMEGROUP