

Bridge



MECHANICAL AND
ELECTROMECHANICAL
TRIPOD TURNSTILE




CAME

Total safety minimum footprint.

Bridge is the mono and bi-directional tripod turnstile, ideal for controlling entries and exits in small and medium gyms, supermarkets, shops, business premises and many other commercial or service settings.



Dimensions (mm)

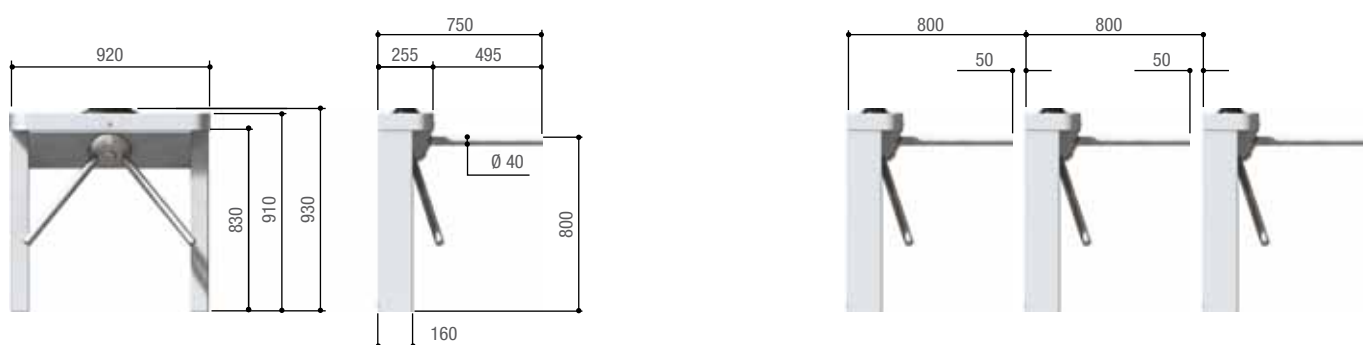

Benefits that become solutions.

EASY TO INTEGRATE

- Available in three different models, all fitted with a hydraulic brake.
- Galvanized steel body, vandal and tamper proof.
- AISI 304 stainless steel arms.
- Epoxy powder varnished for full weather resistance.
- Compatible with all state-of-the-art access control systems.
- Ready to fit onboard command and control electronics.
- Antipanic pressure-operated break away arm (optional)
- Also available with two-way high-luminosity LED stop-go lights.

**Read up at came.com about
the full range of Came products!**

Came is a market leading home, industrial, and special technological projects automation manufacturing company.

A full range of household solutions: from operators for gates and garage doors, to shutter and awning winding motors, and even home automation control, to burglar proof and video entry systems. Technology and reliability to serve your business, thanks to solutions designed for powering large industrial doors, automatic doors, street barriers, turnstiles, access control systems and parking facilities.






MODEL

	PSAP01	PSAP07N • PSAP08
Protection rating (IP)	44	44
Power supply (V - 50/60 Hz)	-	120 - 230 AC
Operating power supply (V)	-	24 DC
Draw (mA)	-	223
Weight (kg)	40	50
Operating temperature (°C / °F)	-	-20 ÷ +55 / -4 ÷ +131

● 230 V AC

SOME VERSIONS MAY NOT BE AVAILABLE IN YOUR COUNTRY. FOR MORE INFORMATION PLEASE CHECK WITH YOUR LOCAL AUTHORIZED DEALER.

DEDICATED ACCESSORIES

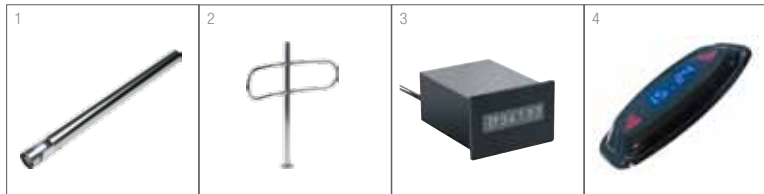

1. Antipanic arms with pressure break away joint.
2. Channeler complete with riser with AISI 304 stainless steel arch, galvanized steel anchoring flange and chromed plastic flange cover.
3. Electronic counter.
4. Stop-go light with LED warning display.

SYSTEM'S COMPLEMENTARY ELEMENTS



1. Monodirectional safety barrier for cart transit. Available with two, three or four arches.
2. Floor anchored safety barrier in AISI 304 stainless steel with polycarbonate panel; thickness 6 mm (0.23 in). H = 900 mm (35.4 in).
3. Floor anchored safety barrier in AISI 304 stainless steel without panel. H = 900 mm (35.4 in).
4. AISI 304 stainless steel safety barrier with antipanic handle. Available with left or right hand post. L = 900 or 1,200 mm (35.4 or 47.2 in), H = 1,000 mm (39.3 in).
5. Galvanized steel riser with anchoring flange and chromed plastic flange cover. H = 980 mm (38.6 in). Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes.
6. AISI 304 stainless steel riser plus anchoring flange and flange cover. H = 980 mm (38.6 in). Available without holes, with 2 holes, with 2+2 90° or 180° holes, with 6 holes, with 8 holes.
7. Transparent polycarbonate panel 6 mm thick. L = 750 mm (29.5 in), H = 800 mm (31.5 in).
8. AISI 304 stainless steel riser. H = 900 mm (35.4 in), Ø 80 mm (3.15 in). Available without clips, with 2 clips, with 2+2 90° or 180° clips, with 6 clips, with 8 clips.
9. Joining sleeves. Available in chromed plastic, AISI 304 stainless steel and AISI 304 stainless steel specifically for wall mounting.
10. Horizontal tube for AISI 304 stainless steel safety barriers. Ø 40 mm (1.57 in) thickness 1 mm (0.04 in). Available in several measurements: 500, 1,000, 1,500, 2,000 mm (19.7, 39.4, 59.1, 78.7 in).



GARANZIA QUALITÀ ORIGINALE

Came products are entirely designed and made in ITALY



Came S.p.A. is Quality and Environmentally certified by
UNI EN ISO 9001
UNI EN ISO 14001



© CAME SPA - KDEP#CENB3A3S314 - JAN_2014 - EN

Even partial reproduction is prohibited • Came reserves the right to make any changes to this document at any time



Came S.p.A.

Via Martiri della Libertà, 15
 Dosson di Casier
 Treviso - Italy

www.came.com

Came is a company of
CAMEGROUP